

**RADII™
H1074X
H1074Y**

Rotating Anode X-ray Tube Assembly

- ◆ The tube unit is so constructed that an X-ray tube is sealed in a diagnostic type protective tube housing of electric shockproof, radiation protection, etc.
- ◆ X-ray tube assembly with double-focus rotating anode X-ray tube H1074 is intended to be used for all routine diagnostic examinations with conventional or digital radiographic workstations of OEM (Original Equipment Manufacturer).
- ◆ Kailong product version adheres to IEC standards.



General Data

Safety Classification:

FDA	I
IEC60601-1:2005.....	IB
Directive 93/42/EEC	IIB

Electrical:

Circuit:

High Voltage Generator.....Constant Potential High-Voltage Generator
 Grounding..... Center-grounded

Nominal X-ray Tube Voltage (IEC60613:2010):

Radiographic.....125 kV
 Fluoroscopic.....125 kV

Nominal Focal Spot Value (IEC60336:2005):

Large Focus.....2.0
 Small Focus.....1.0

Nominal Anode Input Power (at 0.1s) :

	50 Hz	60 Hz
Large Focus.....	43 kW	47 kW
Small Focus.....	21 kW	22 kW

Stator Key Values:

One phase stator

	Starting		Running	
	50	60	50	60
Driven Frequency [Hz]	50	60	50	60
Input Power [W]	1450	1450	80	80
Voltage * [V]	220	220	60	60
Current [A]	7.5	7.5	1.5	1.5
Min. Speed Up [s]	0.6	0.6	-	-
Capacitor [μ f]	43	30	43	30

* The every applied voltage must be never exceeded 110% of the above specification.

Stator Resistance:

Main Winding (P) – Common (C) 18~22 Ω
 Shift Winding (S) – Common (C) 45~55 Ω

Rotating speed:

50Hz Min. 2700 rpm
 60Hz Min. 3200 rpm

Resistance between Housing and Low Voltage Terminals Min. 2 M Ω
 Normal Operating Range of the Housing Temperature 16 ~ 75 $^{\circ}$ C
 Mode of Operation Intermittent

Mechanical:

Dimensions.....	See dimensional outline
Overall Length.....	485 mm
Maximum Diameter	153 mm
Target:	
Anode Angle	16 degrees
Diameter	74 mm
Construction.....	Tungsten faced Molybdenum
Filtration:	
Permanent Filtration	0.9mm Al / 75 kV IEC60522:1999
Available Additional Filter combination (3×0.5 mm)	Maximum 2.4 mm Al / 75 kV
Radiation Protection (In accordance with IEC60601-1-3:2008):	
Leakage Technique Factor	125 kV, 1.44mA
X-ray Coverage	430×430 mm at SID 1000 mm
Weight (Approx.)	18 kg
High Voltage Receptacle.....	To meet the requirements of IEC60526 Corrigendum1:2010
Cooling Method.....	Natural or forced air

Absolute Maximum and Minimum Ratings

(At any time, these values must not be exceeded.)

Maximum X-ray Tube Voltage (IEC60613:2010):

Radiographic	125 kV
Between Anode (or Cathode) and Ground.....	75 kV
Minimum X-ray Tube Voltage.....	40 kV
Maximum X-ray Tube Current (IEC60613:2010)	See rating charts
Large Focus.....	570 mA
Small Focus.....	340 mA

Maximum Filament Current:

Large Focus.....	5.4 A
Small Focus.....	5.4 A

Filament Voltage:

Large Focus (At maximum filament current 5.4 A).....	8.5~11.5 V
Small Focus (At maximum filament current 5.4 A).....	6.5~8.8 V

Filament Frequency Limits.....0 ~ 25 kHz

Continuous Anode Input Power (IEC60613:2010).....120 W (169 HU/s)

(Fluoroscopic, repeated radiographic or mixed exposure)

Thermal Characteristics:

Anode Heat Content.....	111 kJ (150 kHU)
Maximum Anode Heat Dissipation.....	475 W (667 HU/s)
X-ray Tube Assembly Heat Content.....	900 kJ (1250 kHU)

Nominal Continuous Input Power (IEC60613:2010):

 Without Air-circulator180W (14.4 kHU/min)

Environmental Limits

Operating Limits:

Temperature.....	10 ~ 60 °C
Humidity	30 ~ 75 %
	(No condensation)

 Atmospheric Pressure 70 ~ 106 kPa

Shipping and Storage Limits:

Temperature.....	-20 ~ 70 °C
Humidity	20 ~ 90 %
	(No condensation)


 Atmospheric Pressure 50 ~ 106 kPa

Recommended Seasoning Procedure for Long Period Unused Tube

In order to keep long term to use x-ray tube device without any failure, please make seasoning procedure before usage, and enough cooling after application.

Seasoning procedure

1. Before the initial start-up of the x-ray tubes or after extended idle time (more than 2 weeks), we suggest to make seasoning procedure. And when tubes become unstable, recommend make seasoning procedure according to below seasoning procedure table.
2. Ensure that adequate radiation safety precautions are taken to protect any existing image intensifier against radiation. In order to protect x-ray leakage radiation, please close the collimator which is assembled into the port window of x-ray source.
3. When the tube current becomes unstable during high voltage ramp up, it is necessary to reduce the high voltage to be sure the tube current become stable.
4. Seasoning procedure must be done by professional and safety knowledge people.

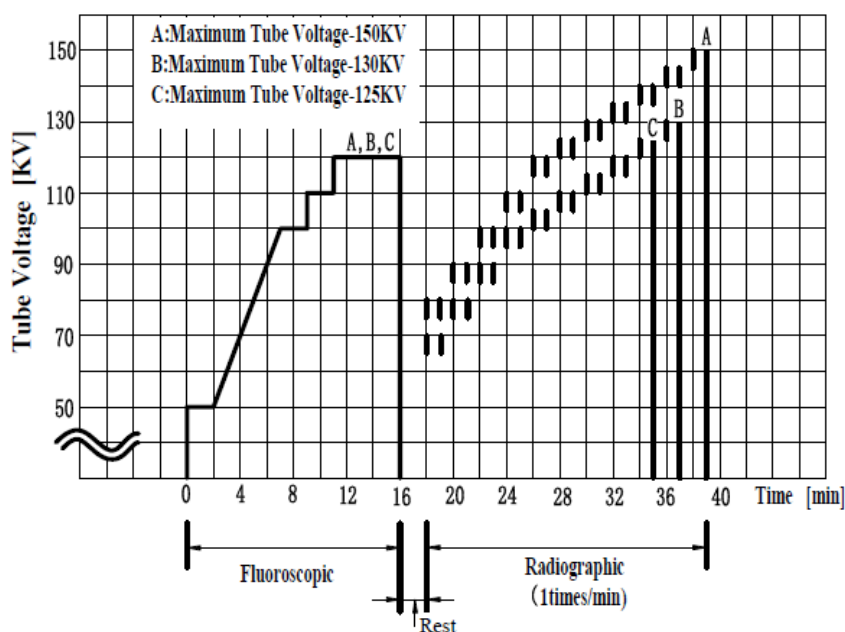

When tube current cannot be set 50% mA, the tube current should be set not excess 50% and nearest value which close to 50% value.



Maximum Rating Charts

(Absolute Maximum Rating Charts)

Conditions: Tube Voltage

Constant Potential High-Voltage Generator

Stator Power Frequency 50 Hz

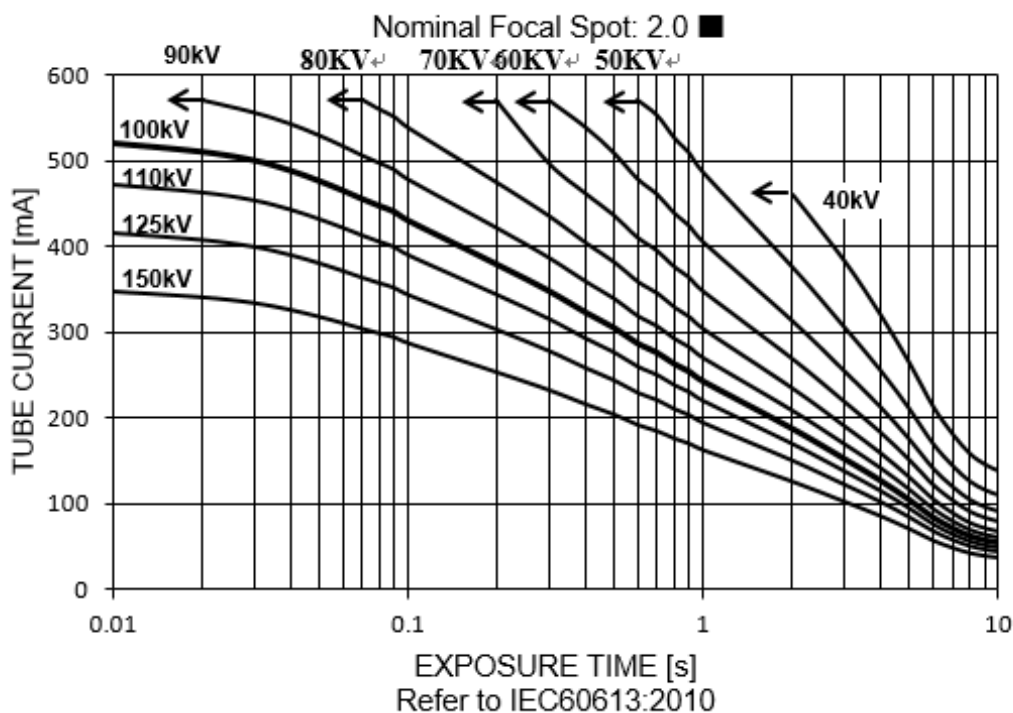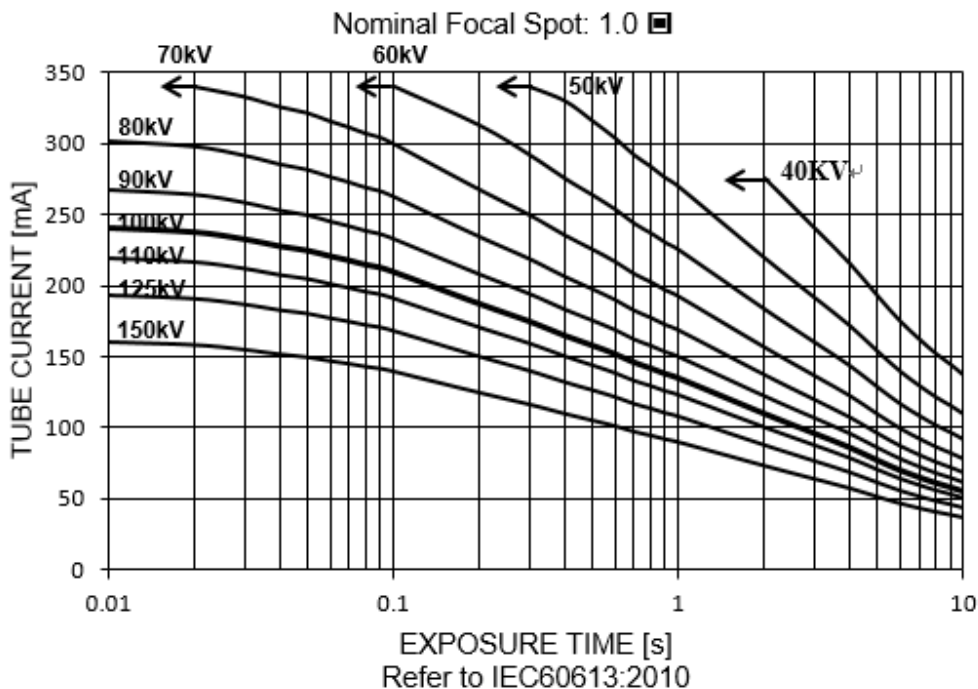



Maximum Rating Charts

(Absolute Maximum Rating Charts)

Conditions: Tube Voltage


Constant Potential High-Voltage Generator

Stator Power Frequency 60 Hz

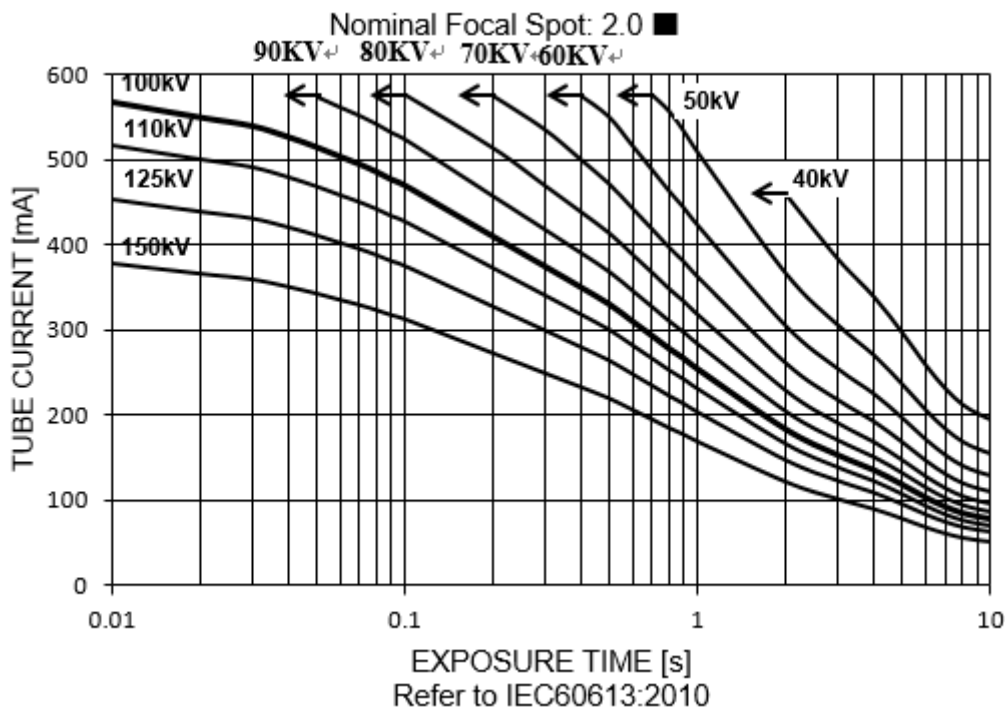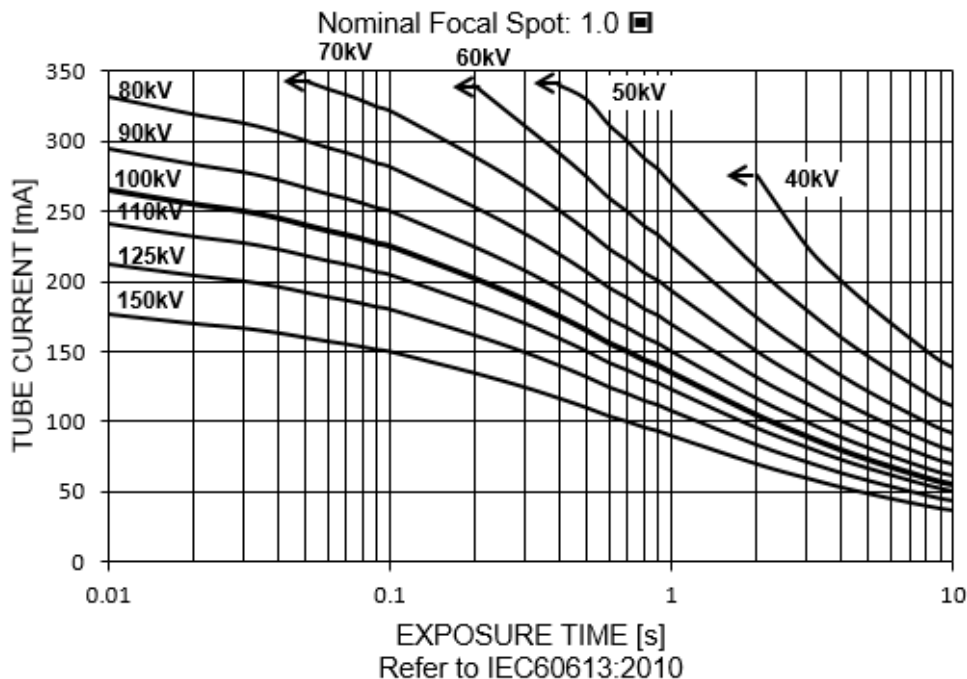


Emission Curves of the Cathode

Constant Potential High-Voltage Generator
 Nominal Focal Spot Value: 1.0 \square

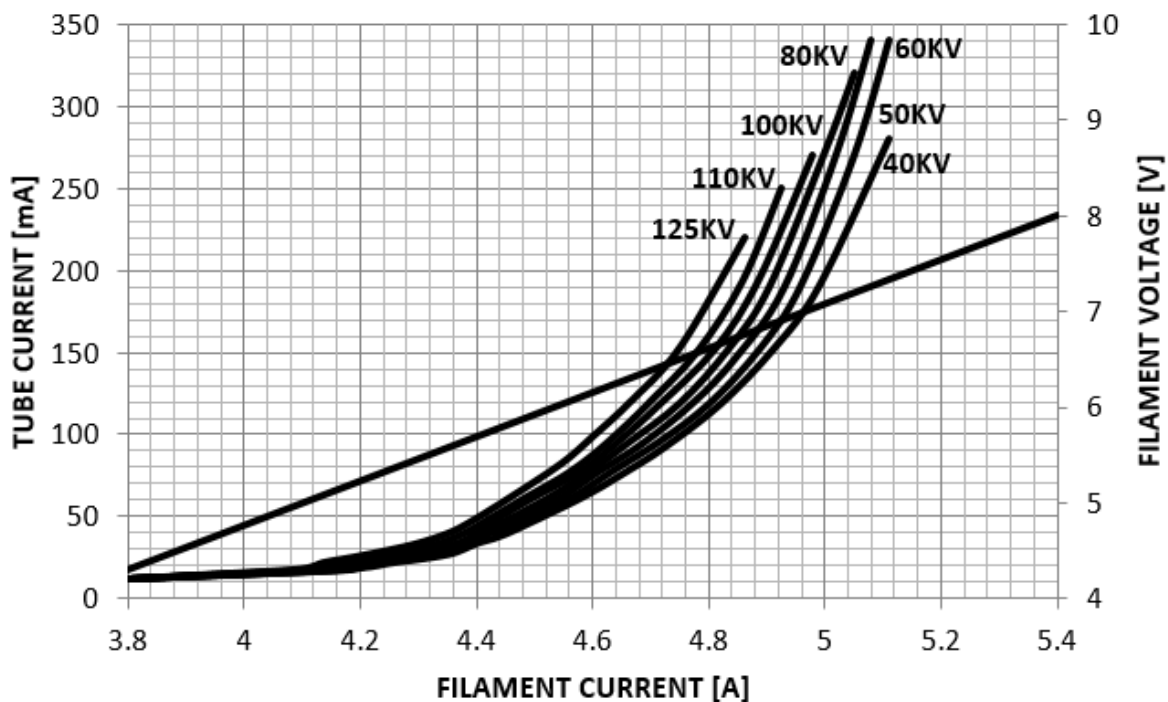


Constant Potential High-Voltage Generator
 Nominal Focal Spot Value: 2.0 \square

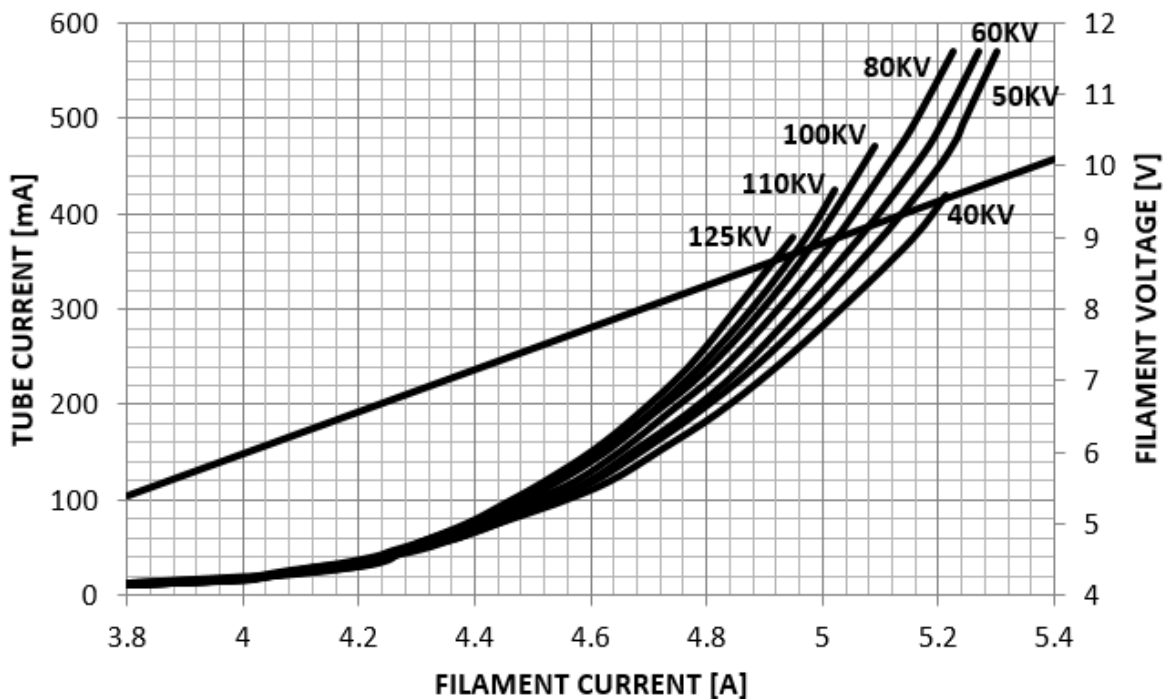


Thermal Characteristics

X-ray Tube Assembly Heating / Cooling Curve

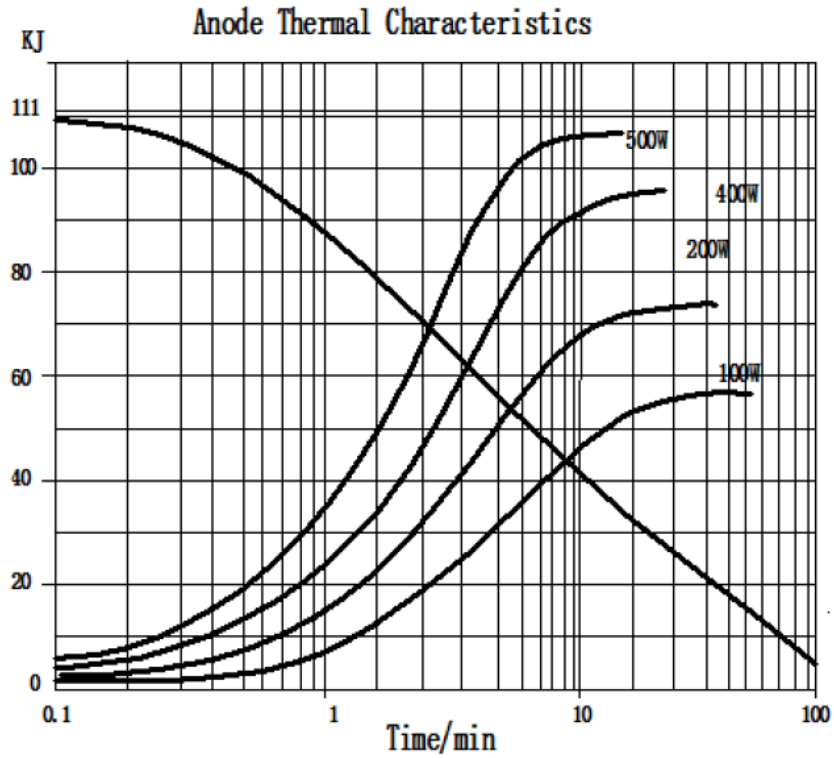


Heating and Cooling Curves of X-Ray Tube Assembly
Housing Thermal Characteristics



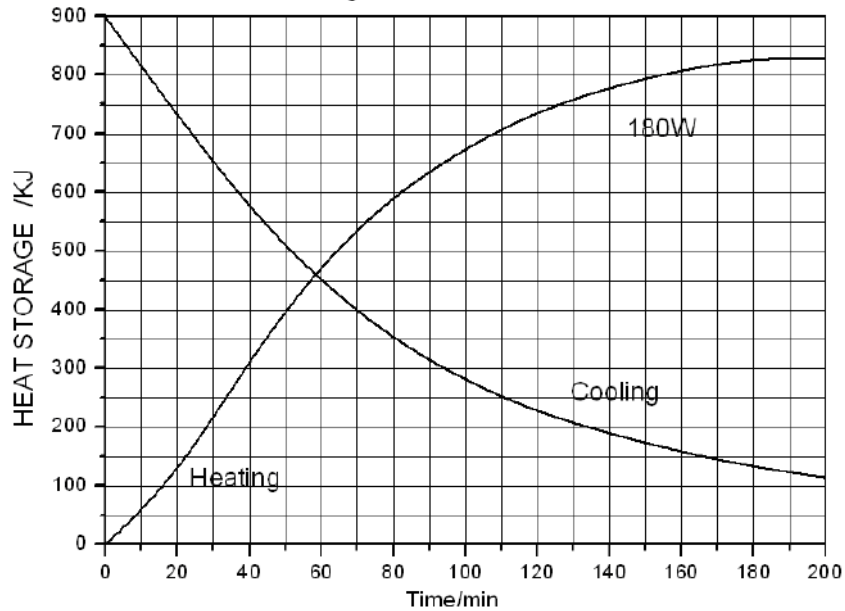


Maximum Radiation Field




The field coverage depends on the source-image distance (SID) and the anode angle. For example field coverage of 430x430mm can be achieved at 1000mm SID with this tube assembly (16° anode angle)

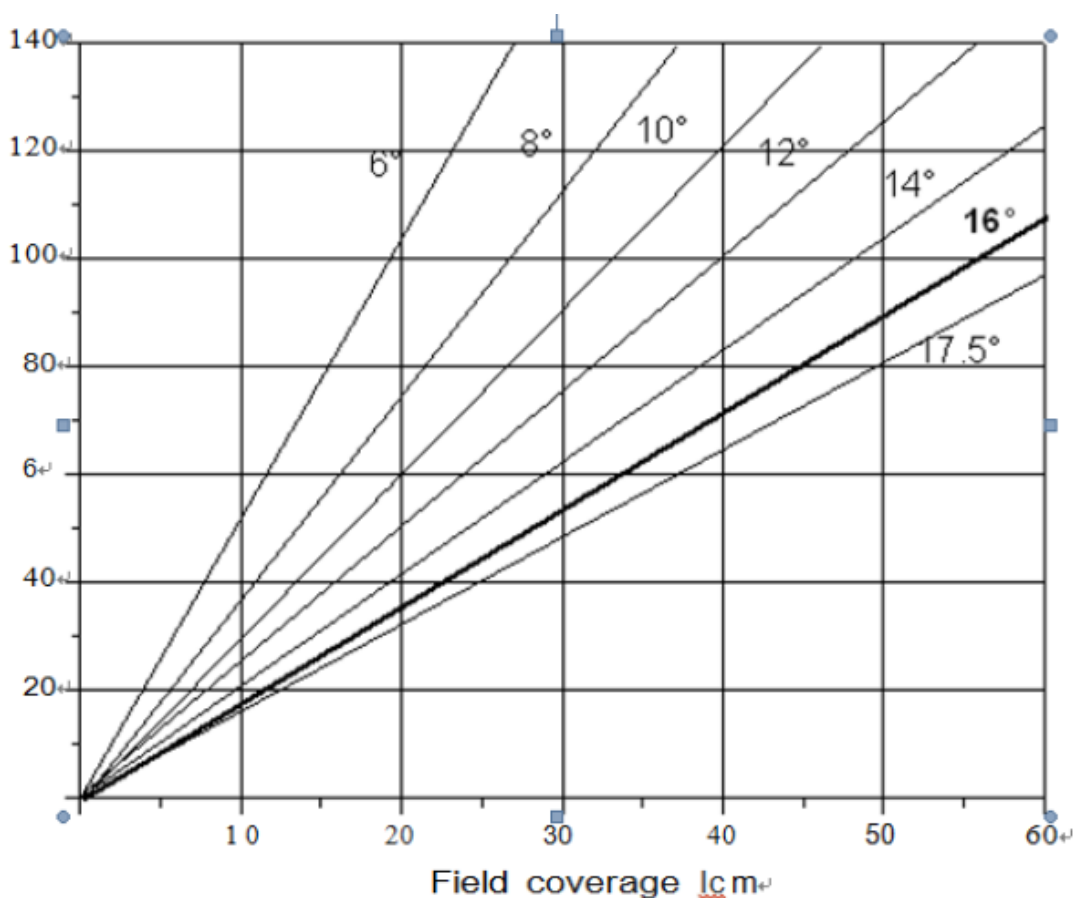

X-Ray Tube Assembly Dimensional Drawings - H1074X

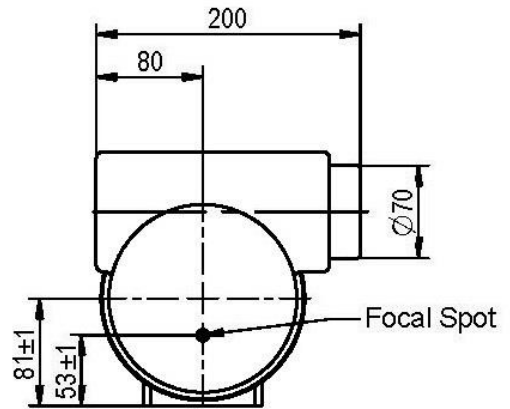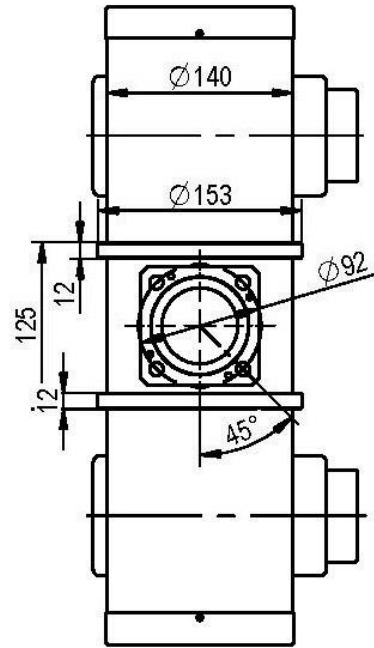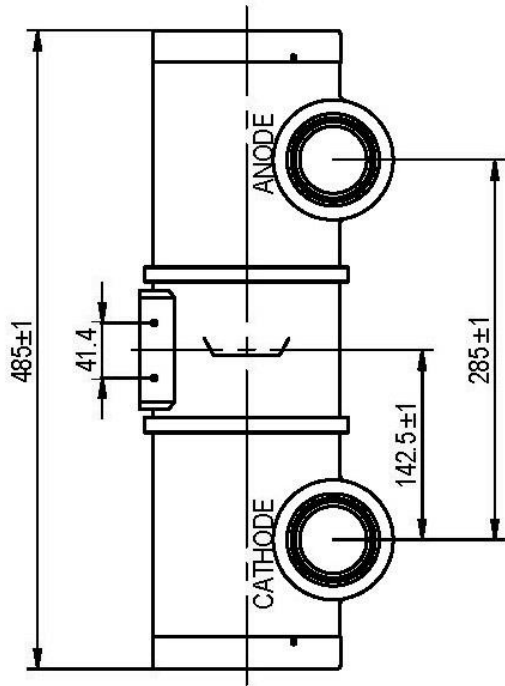

X-Ray Tube Assembly Dimensional Drawings - H1074Y

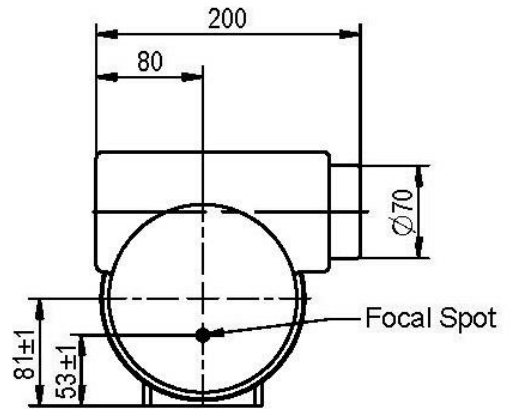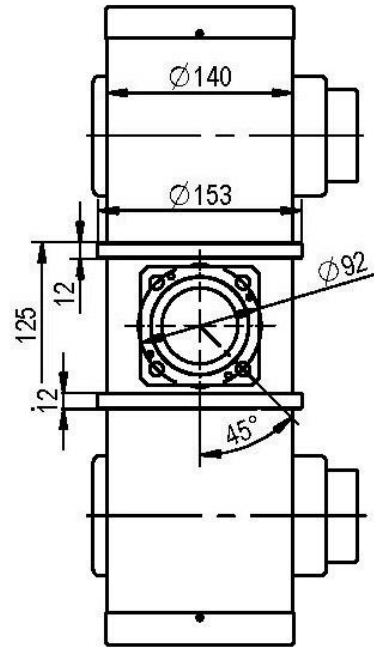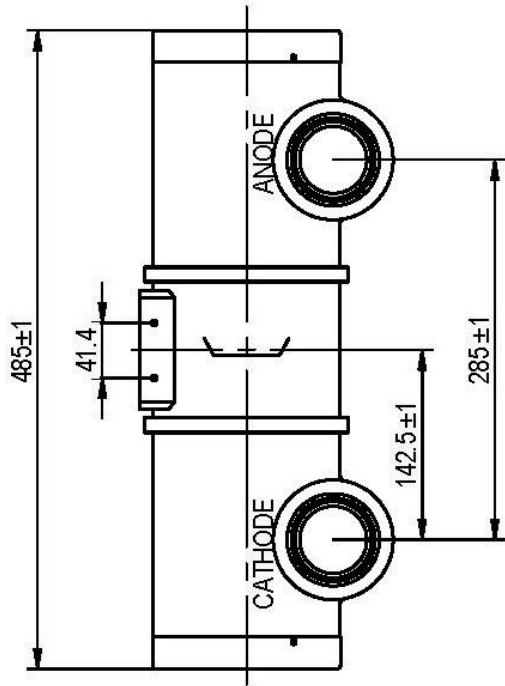

Cautions!!!

X-ray tube will emit X-ray when it is energized with high voltage, Special knowledge should be required and cautions need to be taken when handling it.

1. Only a qualified specialist with X-Ray tube knowledge should assemble, maintain and remove the tube. When mounting tube inserts adopt proper caution, in order to avoid glass bulb breaking and fragments projection. Please use protective gloves and glasses.
2. Tube insert connected to H.V. supply is a radiation source: be sure to take all necessary safety cautions.
3. Wash thoroughly with alcohol the external surface of tube insert (care of fire risk). Avoid contact of dirty surfaces with cleaned tube insert.
4. Clamp system inside housing or self-contained units must not mechanically stress the tube.
5. After installation, check the right working of the tube (no fluctuation of tube current nor crackling).
6. Comply with insert thermal parameters, planning and programming the exposure parameters and cooling pauses. Housing or self-contained units must be provided with an adequate thermic protection.
7. Voltages indicated in charts are valid for transformer supplied with ground center.
8. It is extremely important to observe the connection diagram and the grid resistor value. Any change could modify the dimensions of the focal spot, also varying diagnostic performances or overloading anode target.
9. Tube inserts contain environment polluting materials, particularly lead liner tubes. Please apply to qualified operator for waste disposal, according to local regulation requirements.
10. When any abnormalities are found during operation, immediately switch off the power supply and contact the service engineer.

Authorized representative of CE medical products in EU, EEA, Swiss and

Turkish markets:

Shanghai International Holding Corp. GmbH (Europe)

Add: Eiffestrasse 80, 20537 Hamburg, Germany

Tel: +49-40-2513175

Fax: +49-40-255726

Dimid No.:DE/0000040627

E-mail: shholding@hotmail.com

Notes

- This high vacuum product is produced according to state-of-the-art technology. To prevent implosion please handle with care and use protective devices, e.g. glasses!
- In the interest of complying with legal requirements concerning the environmental compatibility of our products (protection of natural resources, avoidance of waste) we endeavor to reuse components and to return them to the production cycle. We guarantee the functioning, quality and life of these components by taking extensive quality assurance measures, just as for factory-new components.

The Hangzhou Kailong Medical instruments Co., Ltd. is ISO 13485 certified, manufactures in accordance with the Quality System Regulations (QSR) as defined by the Food and Drug Administration (FDA) and endeavors to comply with legal requirements concerning the environmental compatibility of its products.

The reproduction, transmission or use of this document or its contents is not permitted without express written consent. Offenders will be liable for damages. Kailong reserves the right to modify the design and specifications contained herein without prior notice. All rights reserved, particularly in connection with patent applications or registrations of utility model or design.
© Hangzhou Kailong Medical instruments Co., Ltd.

For further information, please contact:
Hangzhou Kailong Medical instruments Co., Ltd.
Address: 6, No. 6 Road, Dongzhou Industrial Zone, Fuyang, Hangzhou, China 311401
Fax: +86571 87195003
<http://www.kailongx-ray.com>